

The Effectiveness of solenoid

by Suryani Dyah Astuti

Submission date: 24-May-2021 07:56PM (UTC+0800)

Submission ID: 1593086302

File name: fields_to_reduce_precipitation_levels_of_CaCO3_in_hard_water.pdf (302.39K)

Word count: 3715

Character count: 18335

The effectiveness of solenoid magnetic fields to reduce precipitation levels of CaCO_3 in hard water

Fadli Ama^{1,2}, Suryani D. Astuti^{1,3,*}, Tri A. Prijo¹, Qod'nu Rahmawati¹, Yunus Susilo⁴ and Rahma A. Puspitasari⁵

¹*Departement of Physics, Faculty Science and Technology, Universitas Airlangga, Surabaya, Indonesia 60115*

²*Biomedical Engineering, Faculty Science and Technology, Universitas Airlangga, Surabaya, Indonesia 60115*

³*Biophysics and Medical Physics Research Group, Faculty of Sciences and Technology, Universitas Airlangga, Surabaya, Indonesia 60115*

⁴*Geomatica Engineering, Faculty of Engineering, Universitas Dr Soetomo, Surabaya, Indonesia 60118*

⁵*Magister of Biomedical Engineering, Faculty Science and Technology, Universitas Airlangga, Surabaya, Indonesia 60115*

(Received 24 February, 2020; Accepted 20 June, 2020)

ABSTRACT

The formation of scale in the pipe walls and operating units due to high water hardness is a serious problem that is often found in industry. In general, scale deposits are composed of compounds which have low solubility, such as calcium carbonate (CaCO_3). This study aims to determine the effect of the magnetic field and the duration of magnetic field exposure on CaCO_3 precipitation in hard water and to determine the relationship between the magnetic field and the duration of exposure to CaCO_3 precipitation. Sampling was carried out by mixing a solution of Na_2CO_3 and CaCl_2 to form water hardness levels of 190-210 ppm. The sample is placed in a box that is capable of causing water to circulate. Samples were divided into Group T0, ie the control group without treatment, Group B1 was treatment with a magnetic field of 160 mT, group B2 was treatment with a magnetic field of 180 mT, and group B3 was treatment with a magnetic field of 200 mT with time exposure of the magnetic field is done for t1 is 30 minutes, t2 is 60 minutes, and t3 is 90 minutes. CaCO_3 precipitation levels were measured using EDTA complexometric titration techniques. The data obtained were analyzed by factorial ANOVA statistics to determine the effect of treatment factors and the value of optimal treatment factors. The EDTA complexometry titration results showed a decrease in CaCO_3 precipitation levels by 73.57 - 173.41 ppm or about 25.99% - 64.72% along with the induction of magnetic fields and the duration of exposure. The results of the factorial anova analysis showed that the most influential magnetic field at 200 mT and the most optimal exposure time at 90 minutes was able to reduce CaCO_3 precipitation levels by 64.72%. Thus, the magnetic field and the duration of exposure affect the CaCO_3 precipitation and there is a correlation between the magnetic field and the exposure time.

Key words : Magnetic field, Solenoid, CaCO_3 Precipitation, Hard water

Introduction

Hard water is water that contains dissolved ions such as Ca_2^+ , Mg_2^+ , Be_2^+ , Br_2^+ ions, and two positively charged ions (Saksono, 2006). Hard water is expressed in units of ppm CaCO_3 or mg (CaCO_3) / liter. Calcium carbonate (CaCO_3) is the result of precipitation from hard water. The existence of this precipitation indicates the level of water hardness (Alimi *et al.*, 2006). The level of water hardness is influenced by CaCO_3 levels. The level of water hardness is divided into five, namely very low (levels 0-70 ppm), low (70-140 ppm), moderate (140-210 ppm), high (210-320 ppm) and very high (320-350 ppm) (Hasan *et al.*, 2011).

In general, CaCO_3 precipitation can cause the formation of a little foam so that the use of detergent soap increases. In the industrial world, CaCO_3 precipitation is a problem in the piping system which can inhibit the flow rate in the pipe so that the pump work becomes heavier (Gholizadeh *et al.*, 2005).

These problems can be overcome in several ways, such as distillation, addition of dissolved ions and chemicals, and the provision of magnetic fields (Gabrielli *et al.*, 2001). Magnetic fields have been shown to stimulate the reactions of photochemical type 2 in the photosensitization process to produce ROS which have antimicrobial effects (Astuti *et al.*, 2017). In addition, the combination with magnetic fields with light gives the effect of biomodulation and cell activation (Astuti *et al.*, 2015) and provides the effect of organ repair in diabetic cases (Suhariningsih *et al.*, 2019) and kidneys (Astuti *et al.*, 2017). Besides the magnetic field is also effective for reducing lead in wastewater (Astuti, 2020).

Research on the use of magnetic fields has been carried out by several researchers (Busch *et al.*, 1997; Gabrielli *et al.*, 2001; Kobe *et al.*, 2003; Saksono, 2006). The magnetic field used is a permanent magnetic field with a certain magnetic field (Mahmoud *et al.*, 2016), a certain magnetization time, as well as with static water conditions (static) and flowing water (dynamic) (Mysliwiec *et al.*, 2016). The purpose of this magnetic field is to accelerate the CaCO_3 precipitation process so as to reduce water hardness. The results of the study by Gabrielli *et al.* (2000) who used ten pairs of permanent magnets concluded that the greater the value of the magnetic field, the Ca^{2+} ions in the solution decreased. In addition, Saksono *et al.* (2007) who used 7 pairs of permanent magnets with a magnitude of 2000-5200

Gauss magnetic field concluded that the greater the magnetic field exerted, the CaCO_3 precipitation increased. This is influenced by four things, including flow velocity, magnetization time, concentration of solution and magnitude of the magnetic field.


According to Alimi *et al.* (2006), the treatment of acidity (pH) of the solution and flow velocity in the magnetization area was 1600 Gauss and had a very important effect in the formation of nucleation and precipitation types of CaCO_3 . Saksono (2006) proved that there was a decrease in Ca_2^+ levels in the solution which was marked by a decrease in CaCO_3 precipitation at the 30th minute in the solution. While there was an increase in Ca_2^+ levels in the precipitancy results. This is caused by the transformation of solution particles into a precipitate. CaCO_3 precipitation with a magnetic field is the effect of the Lorentz force of the Ca_2^+ and CO_3^- molecules that move through the magnetic field. The Lorentz force effect can cause polarization of the solution so that the ion shift occurs so that it encourages local displacement in the solution which can contribute to the increasing fusion of ions. In addition, CaCO_3 precipitation is caused by the presence of Van der Waals forces or the attractive forces between particles in solution (Alimi *et al.*, 2007).

This study aims to determine the effectiveness of the CaCO_3 precipitation process in hard water using a solenoid electromagnetic field with a magnetic field variation of 160 mT, 180 mT, 200 mT and variations in the exposure time of 30 minutes, 60 minutes, 90 minutes.

Materials and Methods

Sample Solution

The hard water solution model used to see the process of forming CaCO_3 particles is a mixture of Na_2CO_3 and CaCl_2 solution. The reaction equation can be written as follows (Saksono *et al.*, 2006) :



Mole ratio = 1: 1: 1: 2: 11

Because the water hardness level is equivalent to 1 ppm CaCO_3 , then determine the CaCO_3 mole first.

$$\text{mol CaCO}_3 = \frac{g}{\text{Mr} [\text{CaCO}_3]}$$

$$\text{mol CaCO}_3 = 0,0125 \times 10^{-3} = 0.0125 \text{ mmol}$$

$$\text{mol CaCO}_3 = 0,0125 \text{ mmol}$$

Determine the mass of $\text{Na}_2\text{CO}_3 \cdot 10\text{H}_2\text{O}$

Mr $[\text{Na}_2\text{CO}_3 \cdot 10\text{H}_2\text{O}] = 262$
 Mass $\text{Na}_2\text{CO}_3 \cdot 10\text{H}_2\text{O} = \text{mole} \times \text{Mr} = 3.275 \text{ mg}$
 So, for 1 ppm requires mass of $\text{Na}_2\text{CO}_3 \cdot 10\text{H}_2\text{O}$
 3,275 mg/L.

Whereas for 200 ppm, the mass of $\text{Na}_2\text{CO}_3 \cdot 10\text{H}_2\text{O}$
 $= 3.275 \times 200 = 655.00 \text{ mg/L}$.

Because the sample is 7.5 L, so the mass of
 $\text{Na}_2\text{CO}_3 \cdot 10\text{H}_2\text{O}$ needed is:

$$655.00 \text{ mg} \times 7.5 = 4912.50 \text{ mg} = 4.9125 \text{ g}$$

So as to determine mass of $\text{CaCl}_2 \cdot \text{H}_2\text{O}$

$$\text{Mr} [\text{CaCl}_2 \cdot \text{H}_2\text{O}] = 10^3$$

$$\text{Mass of } \text{CaCl}_2 \cdot \text{H}_2\text{O} = \text{mole} \times \text{Mr} = 1,289 \text{ mg}$$

The total precipitation of CaCO_3 in hard water is
 a combination of CaCO_3 precipitation in solution
 and on the surface (deposit) (Strazisar *et al.*, 2016).
 The amount of CaCO_3 deposit and total CaCO_3 pre-
 cipitation is a parameter that is measured directly in
 this experiment, while the number of CaCO_3 par-
 ticles formed in the solution can be calculated using
 a mass balance. Calculation of CaCO_3 levels using
 the equations 1-3:

$$\text{Mol } \text{CaCO}_3 = \text{mol}_{\text{EDTA}} \times \frac{V_{\text{EDTA}}}{1000} \quad \dots (1)$$

$$\text{Mass of } \text{CaCO}_3 = \text{mol } \text{CaCO}_3 \times \frac{100.09 \text{ g } \text{CaCO}_3}{1 \text{ mol } \text{CaCO}_3} \quad \dots (2)$$

$$\text{CaCO}_3 \text{ Levels} = \frac{\text{mass of } \text{CaCO}_3}{V_{\text{hard water (Lt)}}} \quad \dots (3)$$

Apparatus Chamber

The instrument used is an electrical design of a so-
 lenoid winding connected to an iron plate and
 mounted on the container where the solution is. In-
 side the container there is a pump as a solution of
 circulation. The source of the magnetic field chosen
 in this study is the solenoid (Linares *et al.*, 2016). So-
 lenoids are made of 1 mm diameter copper wire and
 a wire type resistance of $1.72 \times 10^{-8} \Omega \text{m}$. The solenoid
 has a length of $3.85 \pm 0.05 \text{ cm}$, $2.10 \pm 0.05 \text{ cm}$ in di-
 ameter and 325 turns. The resistance of the solenoid
 is $1.00 \pm 0.05 \Omega$ measured using a digital multimeter
 DB-860. The set-up of experimental devices is
 shown in Figure 1.

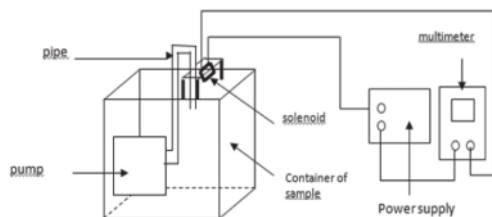


Fig. 1. Set-up of apparatus chamber

Sample Treatment

Samples were divided into Group T0, ie the control
 group without treatment, Group B1 was treatment
 with a magnetic field of 160 mT, group B2 was treat-
 ment with a magnetic field of 180 mT, and group B3
 was treatment with a magnetic field of 200 mT.
 Treatment in the form of exposure to a magnetic
 field is done for t1 is 30 minutes, t2 is 60 minutes,
 and t3 is 90 minutes.

Each solution is placed in a container that is able
 to circulate the solution and then given a magnetic
 field exposure from a solenoid winding with a cur-
 rent of 0-3A. The magnetic field is measured using
 a TM-03 digital meter and the current is measured
 using a TM-03 digital meter. To find out the level of
 CaCO_3 precipitation EDTA titration test was per-
 formed on all samples so that changes can occur.

Statistical Analysis

Data obtained were analyzed by Anova test to de-
 termine the effect of magnetic field exposure and
 the length of time of exposure to CaCO_3 precipita-
 tion. To find out the optimal exposure that results in
 the largest percent reduction in CaCO_3 levels using
 the Post Hoc Tukey test. Calculation of percentage
 reduction in CaCO_3 levels uses the following equa-
 tion 4:

% CaCO_3 levels =

$$\left| \frac{\Sigma \text{CaCO}_3 \text{ levels treatment} - \Sigma \text{CaCO}_3 \text{ levels control}}{\Sigma \text{CaCO}_3 \text{ levels control}} \right| \dots (4)$$

Results and Discussion

After setting the solenoid, the next step is to cali-
 brate the solenoid. Calibration is carried out by mea-
 suring current and magnetic fields (Wahyudi and
 Ahmad, 2013; Yudhistira and Wibowo, 2019). Provi-
 sion of current using a DC current source with 0-3 A
 current specifications. Current flowing is measured
 using a digital multimeter DT-860B and magnetic
 field measurements using a TM-03 digital tesla-
 meter. Calibration of a solenoid using a conduc-
 tor produces a magnetic field three times greater
 than a solenoid without a conductor. The magnetic
 field calibration data is shown in Figure 2. The cali-
 bration results show the magnitude of the linear
 magnetic field relative to the amount of current
 flowing. The greater the current applied, the greater
 the magnetic field produced.

The characterization result of hard water is
 shown in Table 2.

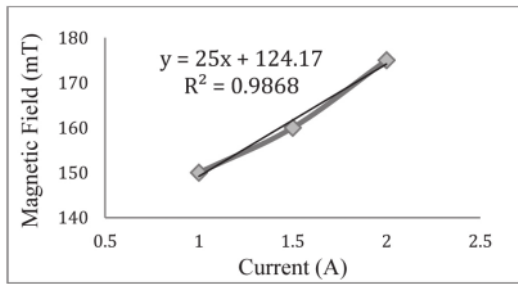


Fig. 2. The magnetic field calibration

Table 2. Data of hard water characterization

Control	V _{EDTA} (mL)	CaCO ₃ Levels (ppm)
1	1.85±0.05	194.42±0.05
2	1.98±0.05	208.09±0.05
3	1.98±0.05	208.09±0.05

The results of hard water characterization showed no significant difference in various VEDTA. Figures 3 and 4 show the effect of the magnetic field and the duration of exposure on CaCO₃ precipitation levels.

The graph above shows that the CaCO₃ level decreases with the administration of the magnetic field

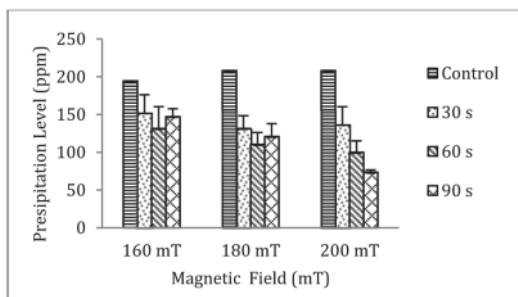


Fig. 3. Graph of the relationship between precipitation levels of CaCO₃ versus magnetic fields

and the exposure time of the magnetic field. This proves that the magnetic field and exposure time influence the CaCO₃ precipitation.

Factorial statistical test results showed the influence of magnetic fields ($p = 0.02$), duration of exposure ($p = 0.013$) and interaction of magnetic fields and duration of exposure ($p = 0.049$) significantly influence the percentage reduction in CaCO₃ levels ($p < 0.05$). Tukey Post hoc test results showed that an effective treatment to reduce CaCO₃ precipitation was at 200 mT treatment and 90 minutes exposure

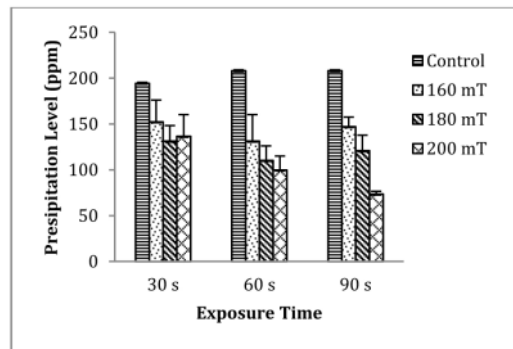


Fig. 4. Graph of the relationship between CaCO₃ precipitation levels versus time exposure

time with a percentage decrease in CaCO₃ levels of 64.72%. Data from the statistical test results are shown in Table 3 below.

Interaction of the Magnetic Field with Precipitation of CaCO₃

The results of data analysis in this study indicate that CaCO₃ levels before and after treatment have decreased. This shows that water hardness decreases. The levels of CaCO₃ precipitation before treatment were around 190-210 ppm, after treatment the levels decreased with the administration of magnetic fields and duration of exposure. At 160 mT magnetic field CaCO₃ precipitation levels around 142.46 ppm, 180 mT magnetic field CaCO₃ precipitation levels around 125.53, and 200 mT magnetic field CaCO₃ precipitation levels around 105.09 ppm. Whereas for 30 minutes of CaCO₃ precipitation levels around 141.29 ppm, 60 minutes for CaCO₃ precipitation levels around 116.19 ppm, and 90 minutes for CaCO₃ precipitation levels around 115.60 ppm. The results of this calculation indicate that the magnetic field 200 and the exposure time of 90 minutes have the greatest influence in decreasing the level of water hardness.

CaCO₃ precipitation is influenced by two forces, namely Van der Waals force (attraction force) (Saksono, 2006) and Lorentz style (Busch *et al.*, 1997; Kobe *et al.*, 2003). Based on the interaction of Van der Waals style, the interaction that occurs in hard water is dipole-dipole interaction. This is because the molecules formed in hard water are polar molecules. Interactions that occur include (1) interactions between Ca₂⁺ ions and CO₃⁻ ions to form CaCO₃ particles, (2) interactions between CaCO₃

Table 3. Data from statistical test results

Factor	Group	N	Percentage decrease of CaCO ₃ content (%)		ANOVA	
			Avg	SD	Sig.	Conclusion
Magnetic Field	Magnetic Field 160 mT ^(a)	3	30.004	3.054	p=0.002	Significantly different
	Magnetic Field 180 mT ^(ab)	3	38.323	3.054		
	Magnetic Field 2000 mT ^(b)	3	48.367	3.054		
	Total	9	38.910	3.054		
Time	Time 30 min ^(a)	3	30.579	3.054	p=0.013	Significantly different
	Time 60 min ^(b)	3	42.914	3.054		
	Time 90 min ^(b)	3	43.201	3.054		
	Total	9	38.910	3.054		
Interaction	B 160 t 30 min ^(a)	3	25.990	5.291	p=0.049	Significantly different
	B 160 t 60 min ^(a)	3	36.313	5.291		
	B 160 t 90 min ^(a)	3	27.710	5.291		
	B 180 t 30 min ^(a)	3	32.013	5.291		
	B 180 t 60 min ^(a)	3	45.783	5.291		
	B 180 t 90 min ^(a)	3	33.733	5.291		
	B 200 t 30 min ^(ab)	3	37.173	5.291		
	B 200 t 60 min ^(ab)	3	46.647	5.291		
	B 200 t 90 min ^(b)	3	64.720	5.291		
	Total	27	38.898	5.291		

particles to form crystals (Alimi *et al.*, 2006), (3) interactions of ions with water molecules to form ions hydrates (Saksono *et al.*, 2008), and (4) interactions between water molecules to form hydrogen interactions.

The first interaction, the magnetic field affects the shift of ions Ca₂⁺ and CO₃²⁻ to shift in the direction of the magnetic field so that the formation of CaCO₃. In the second interaction, the magnetic field affects the shift between CaCO₃ particles that have formed. The displacement of ions and particles is caused by the effect of the Lorentz force, where ions and particles that move in the magnetic field will experience the Lorentz force (Batista, 2018; Griffith, 1999). This is in accordance with the results of the Kobe *et al* (2003) simulation which shifts from 0.2 to 10 nm for ions and 0.2 nm - 20 μm for particles. In the third interaction, Ca₂⁺ and CO₃²⁻ ions will be hydrated by water molecules to form hydrate ions. Hydrate ion formation can be reviewed based on the electronegativity of the ion (Budikania *et al.*, 2010). CaCO₃ compounds have electronegativity differences, so the bonds formed are polar bonds. Compounds in polar bonds tend to be easily hydrated by water molecules, so they can form hydrate ions (Saksono, 2007). Hydrate ion formation is also influenced by the conductivity of the solution. The more the conductivity increases, the more hydrate ions that form as a magnetic field increase. In addition, the forma-

tion of hydrate ions is also influenced by ion hydration energy due to the presence of a magnetic field. The higher the hydration energy, the stronger the molecules are bound around these ions.

The results of this study indicate that water hardness can be reduced by applying a magnetic field. At 200 mT magnetic field exposure and 90 minutes exposure time is the optimum exposure to accelerate CaCO₃ precipitation in hard water so as to reduce water hardness.

Conclusion

The EDTA complexometry titration results showed a decrease in CaCO₃ precipitation levels by 73.57 - 173.41 ppm or about 25.99% - 64.72% along with the induction of magnetic fields and the duration of exposure. The results of the factorial anova analysis showed that the most influential magnetic field at 200 mT and the most optimal exposure time at 90 minutes was able to reduce CaCO₃ precipitation levels by 64.72%. Thus, the magnetic field and the duration of exposure affect the CaCO₃ precipitation and there is a correlation between the magnetic field and the exposure time.

References

Alimi, F., Mohamed, T., Claude, G., Maurin, G. and

- Mohamed, B.A. 2006. Effect of a Magnetic Water Treatment on Homogeneous and Heterogeneous Precipitation of Calcium Carbonate. *Water Research*. 40(10) : 1941-1950.
- Alimi, F., Tlili, M., Amor, M.B., Gabrielli, C. and Maurin, G. 2007. Influence of Magnetic Field on Calcium Carbonate Precipitation. *Desalination*. 206 (1-3): 163-168
- Astuti, S.D., Anggraini, L., Mawaddah, A., Ama, F. and Erawati, P. 2019. Effectiveness of Magnetic Field Induction from Solenoid Coils to Reduce Leads (Pb) in Wastewater. *Poll Res (Pollution Research)*. 38 : S65-S71.
- Astuti, S.D., Wibowo, A., Abdurachman, and Triyana, K. 2017. Antimicrobial Photodynamic Effects of Polychromatic Light Activated By Magnetic Fields to Bacterial Viability. *J. Int. Dent. Med. Res.* 10 (1) : 111-117.
- Astuti, S.D., Prasaja, B.I. and Prijo, T.A. 2017. An *In vivo* photodynamic therapy with diode laser to cell activation of kidney dysfunction. *Journal of Physics: Conference Series* 853.
- Astuti, S.D., Dwi, G.D.N., Supriyanto, A. and Triyana, K. 2015. Photodynamic Combined with Magnetic Field Applications for Viability Activation of Anaerobic Photosynthetic Bacteria. *Applied Mechanics and Materials*. 2015, 771 : 141-144.
- Batista, D. S. 2018. Three-Axial Helmholtz Coil Design and Validation for Aerospace Applications. *IEEE Transaction on Aerospace and Electronic Systems*. 54(1) : 392-403.
- Budikania, Sutanti T., Aryagoeng and Saksono, 2010. Pengembangan Model Persamaan Matematik Presipitasi CaCO_3 pada Sistem Sirkulasi Fluida Dinamik. *Fakultas Teknik Industri UPN Veteran Yogyakarta*.
- Busch, K.W. and Busch, M.A. 1997. Laboratory Studies on Magnetic Water Treatment and Their Relationship to a Possible Mechanism for Scale Reduction. *Desalination*. 109 : 131-148.
- Gabrielli, C., Jaouhari, R., Maurin, G. and Keddam, 2001. Magnetic Water Treatment for scale Prevention. *Water Research*. 35 (13) : 3249-3259.
- Gholizadeh, M., Arabshahi and Benam, M.R. 2005. The Effect of Magnetic Field on Scale Prevention in The Industrial Boilers. *International Journal of Applied Chemistry*. 1(1) : 84-89.
- Griffith, David J. 1999. *Introduction to Electrodynamics*, 3rd edition. New Jersey: Prentice Hall
- Hasan, M., Sapei, A. and Purwanto, J. 2011. Kajian Kebijakan Pengolahan Sumber Daya Air pada Daerah Aliran Sungai Citarum. Bogor: IPB
- Kobe, S., Drazic, Cefalas, A.C., Sarantopoulou, E. and Strazisar, 2003. Nucleation and Crystallization of CaCO_3 in applied Magnetic Fields. *Crystal Engineering*. 5(3-4) : 243-253.
- Linares, R., Berger, K., Hinaje, M., Douine, B. and Leveque, J. 2016. Design of a Vector Magnet Generating Up to 3 T with Three-Axis Orientation. *IEEE Transactions on Applied Superconductivity*. 26(3). <https://doi.org/10.1109/TASC.2016.2539545>
- Mahmoud, B., Yosra, M. and Nadia, A. 2016. Effects of Magnetic Treatment on Scaling Power of Hard Waters. *Separation and Purification Technology*. 171 : 88-92.
- Mysliwiec, D., Szczes, A. and Chibowski, S. 2016. Influence of Static Magnetic Field on The Kinetics of Calcium carbonate Formation. *Journal of Industrial and Engineering Chemistry*. (35) : 400-407.
- Saksono, N. 2006. Magnetisasi Air Sadah untuk Pencegahan Pembentukan Kerak. *Jurnal Teknologi*. 4 (20) : 292-302.
- Saksono, N., Bismo, S., Krisanti, E., Manaf, A. and Widaningrum, R. 2006. Pengaruh Medan Magnet terhadap Proses Presipitasi dalam Air Sadah. *Jurnal Teknologi*. 10(2) : 96-101.
- Strazisar, J., Knez, S. and Kobe, S. 2007. The Influence of The Magnetic field on The Zeta Potential of Precipitated Calcium Carbonate. *Particle and Particles System Characterization*. 18(5-6) : 5-6.
- Suhariningsih, D., Winarni, Husen, S.A., Khaleyla, F., Putra, A.F. and Astuti, S.D. 2019. The effect of electric field, magnetic field, and infrared ray combination to reduce HOMA-IR index and GLUT 4 in diabetic model of Mus musculus, *Lasers in Medical Science*
- Wahyudi, J. and Ahmad, G. 2013. Desain dan Karakterisasi Penggunaan Sensor Efek Hall UGN3503 untuk Mengukur Arus Listrik pada Kumparan Leybold P6271 Secara Non Destruktif. *Teori Dan Aplikasi Fisika*. 01(02) : 185-190.
- Yudhistira and Wibowo, P. 2019. Pengukuran Medan Magnetik Helmholtz Coil Melalui Konversi Tegangan Efek Hall, Prosiding Seminastek. *Fakultas Teknik Universitas Muhammadiyah Jakarta*.
-

The Effectiveness of solenoid

ORIGINALITY REPORT

9%

SIMILARITY INDEX

4%

INTERNET SOURCES

5%

PUBLICATIONS

1%

STUDENT PAPERS

PRIMARY SOURCES

1	vb.ktu.edu Internet Source	1%
2	Eduardo Alencar de Souza, José Antônio da Cunha Ponciano Gomes. "Electromagnetic corrosion control in water cooling systems", <i>Anti-Corrosion Methods and Materials</i> , 2014 Publication	1%
3	www.ijicc.net Internet Source	1%
4	P. Sarma Maruvada, A. Turgeon, D.L. Goulet, C. Cardinal. "An experimental study of residential magnetic fields in the vicinity of transmission lines", <i>IEEE Transactions on Power Delivery</i> , 1998 Publication	1%
5	Submitted to Universitas Airlangga Student Paper	1%
6	Ananta Vashisth, Shantha Nagarajan. "Effect on germination and early growth characteristics in sunflower (<i>Helianthus</i>	1%

annuus) seeds exposed to static magnetic field", Journal of Plant Physiology, 2010

Publication

7 Matwijczuk, A., K. Kornarzyński, and S. Pietruszewski. "Effect of magnetic field on seed germination and seedling growth of sunflower", International Agrophysics, 2012.

Publication

8 www.anl.gov 1 %

Internet Source

9 www.envirobiotechjournals.com 1 %

Internet Source

10 N Wahyuni, TA Zaharah, R Ria. "Characterization of Hydrochloric Acid Activated Natural Kaolin and its application as adsorbent for Mg²⁺", Journal of Physics: Conference Series, 2021

Publication

11 Behrouz Mostafazadeh-Fard, Mojtaba Khoshravesh, Sayed-Farhad Mousavi, Ali-Reza Kiani. "Effects of Magnetized Water and Irrigation Water Salinity on Soil Moisture Distribution in Trickle Irrigation", Journal of Irrigation and Drainage Engineering, 2011

Publication

12 Daniel C. Elton, Peter D. Spencer. "Chapter 8 Pathological Water Science – Four Examples" <1 %

and What They Have in Common", Springer
Science and Business Media LLC, 2021

Publication

13

Fadil Othman. "Influence of magnetic
treatment on the improvement of landfill
leachate treatment", International Journal of
Environment and Waste Management, 2009

Publication

<1 %

14

salmandj.uswr.ac.ir

Internet Source

<1 %

Exclude quotes Off

Exclude matches < 10 words

Exclude bibliography On

The Effectiveness of solenoid

GRADEMARK REPORT

FINAL GRADE

/0

GENERAL COMMENTS

Instructor

PAGE 1

PAGE 2

PAGE 3

PAGE 4

PAGE 5

PAGE 6
